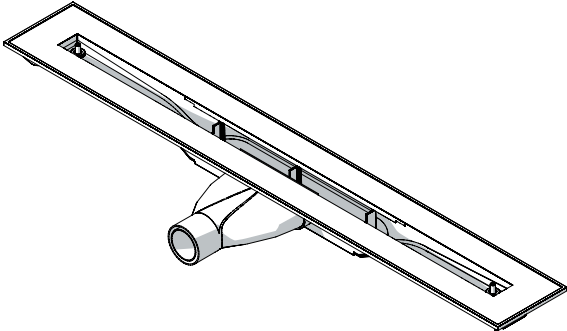
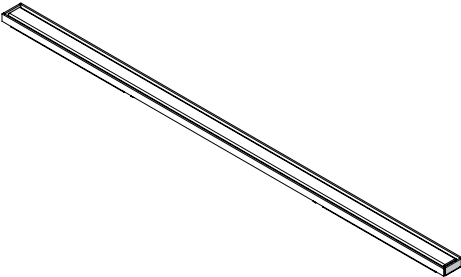
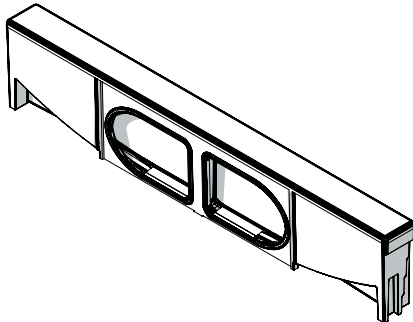
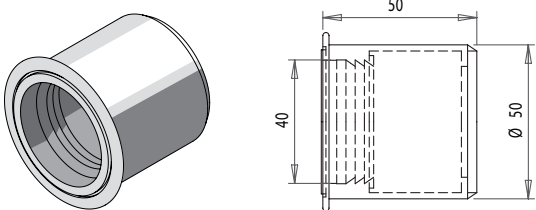
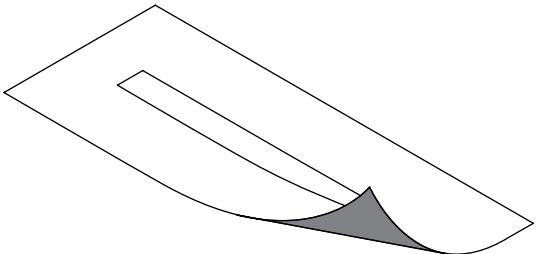
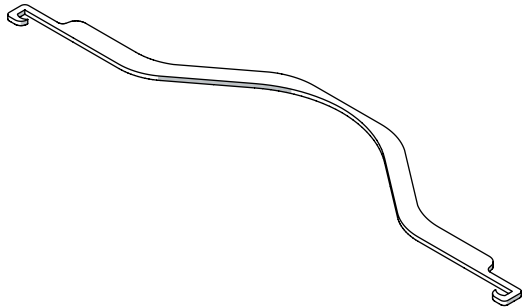



Carrodrain Cayman / Technical Specifications





	<i>Cayman 700</i>	<i>Cayman 800</i>	<i>Cayman 900</i>
Box length	835 mm	935 mm	1035 mm
Box width	235 mm	235 mm	235 mm
Box height	90 mm	90 mm	90 mm
Weight per box (=complete package)	3,05 kg	3,40 kg	3,75 kg
Weight per pallet incl. pallet	136 kg	151kg	166 kg
Number of sets per box	1	1	1
Number of boxes per pallet	40	40	40

PART	DESCRIPTION	CODE
01	 CAYMAN BODY Dimensions : see later in this technical datasheet Material : High Heat ABS General : Drainage system with patented "superflow" technology Pre-glued Kerlox-flange (36mm) Drainage capacity: see KIWA table Max. water temperature = 90°C	
02	 GRILLE SET CAYMAN grille frame + tube CAYMAN 700 INOX stainless steel 304 CAYMAN 700 BLACK stainless steel 304 + epoxy coating L 700 mm x W 30 mm x H 12 mm CAYMAN 800 INOX stainless steel 304 CAYMAN 800 BLACK stainless steel 304 + epoxy coating L 800 mm x W 30 mm x H 12 mm CAYMAN 900 INOX stainless steel 304 CAYMAN 900 BLACK stainless steel 304 + epoxy coating L 900 mm x W 30 mm x H 12 mm	100450 100460 100451 100461 100452 100462

Carrodrain Cayman / Technical Specifications


PART	DESCRIPTION	CODE
04 	CAYMAN SIFON / WATER LOCK Material : High heat ABS drainage capacity: see KIWA table net water lock height = 30 mm not frost resistant	100202
05 	SLIDING SOCKET 40/50 Material : PP-Block Copolymere (PP-B) diameter from 40 mm to 50 mm rubber seal	100028
06 	CAYMAN SEPARATE KERLOX FLANGE Kerlox-membrane with niche KERLOX FLENS CAYMAN 700 : L x W x H = 1000 x 350 x 0,4 mm KERLOX FLENS CAYMAN 800 : L x W x H = 1100 x 350 x 0,4 mm KERLOX FLENS CAYMAN 900 : L x W x H = 1200 x 350 x 0,4 mm more info : see Kerlox technical datasheet	100163 100196 100165
07 	CAYMAN MULTI-KEY Material : stainless steel 304 L 265 mm x W 48 mm x H 2 mm	100208
08 	CAYMAN ADJUSTING SCREW set of 2 ABS adjusting screws M6 54 x 20 mm	100409

Carrodrain Cayman / 700

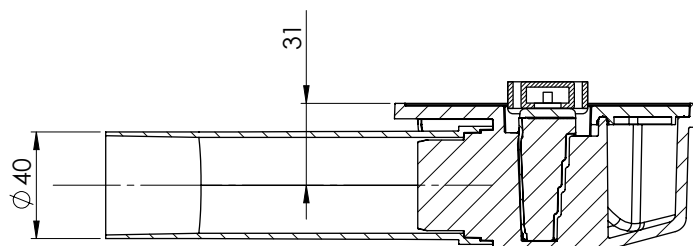
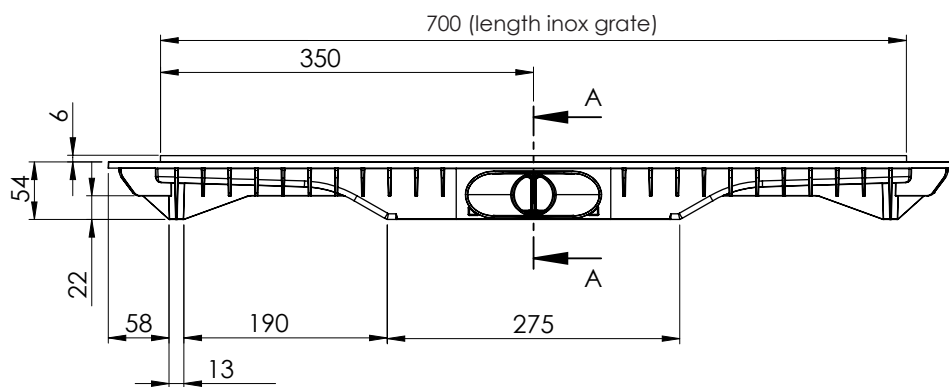
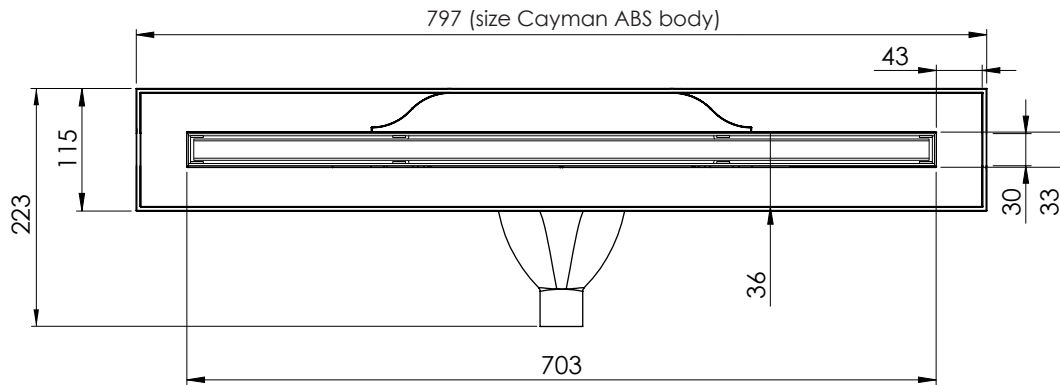


SECTION A-A

Carrodrain Cayman / 800

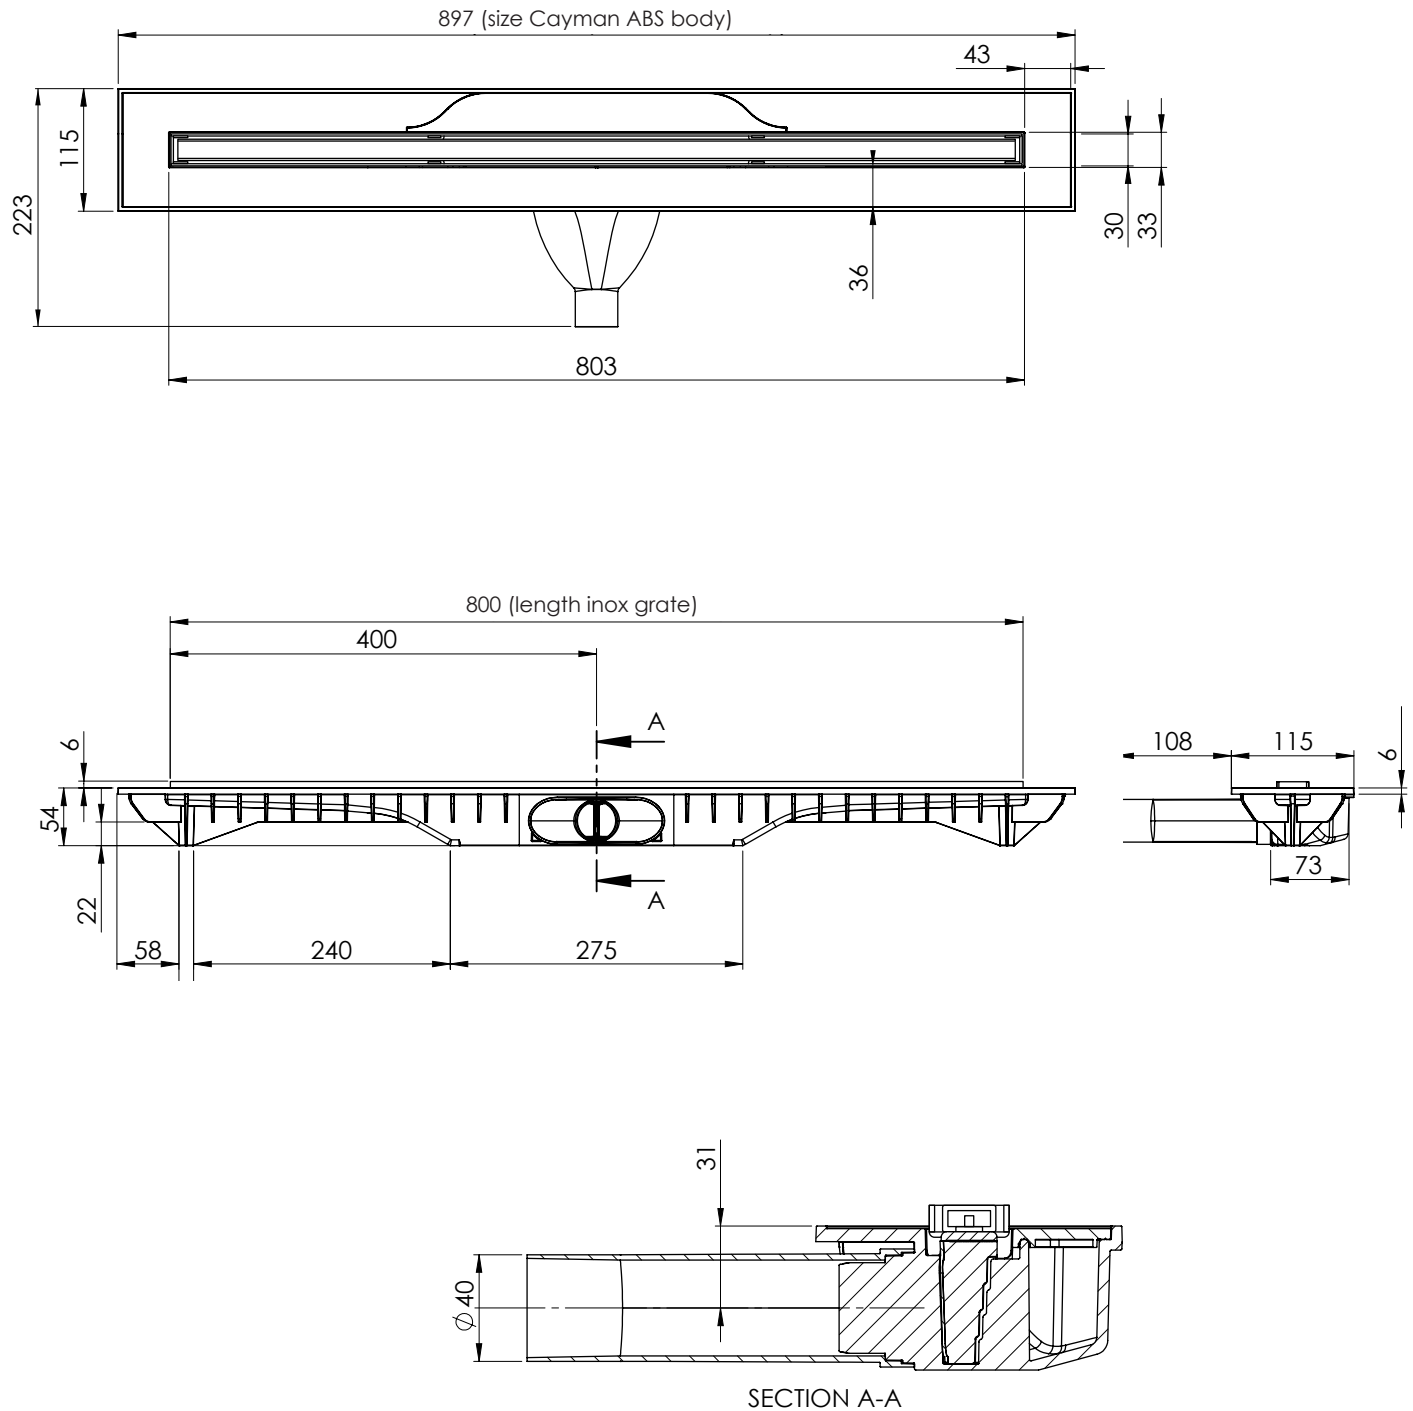

Carrodrain Cayman / 900

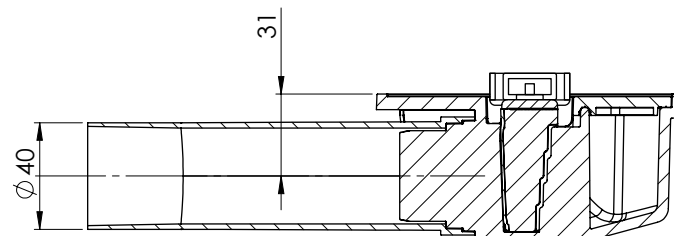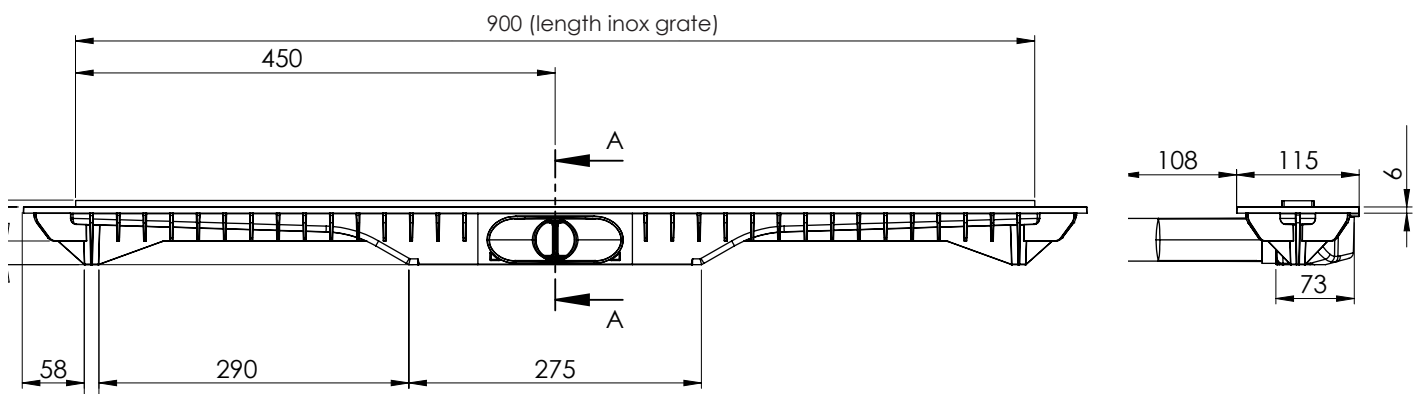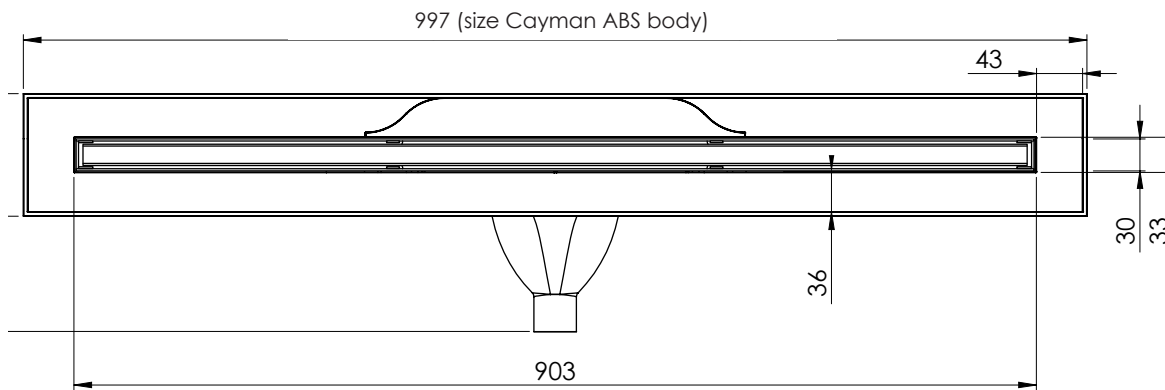


SECTION A-A

Carrodrain Cayman shower drain



	EN 1253-1	EN 274
	This testing method requires a 100 cm drainage pipe and a 20mm water column above the drainage grate.	This testing method requires a 30 cm drainage pipe and a 120mm water column above the drainage grate.
	30,8 l/min. =0,51l/sec.	53,3 l/min. =0,89l/sec.
	28,3 l/min. =0,47l/sec.	46,7 l/min. =0,78l/sec.

FLOW CHART

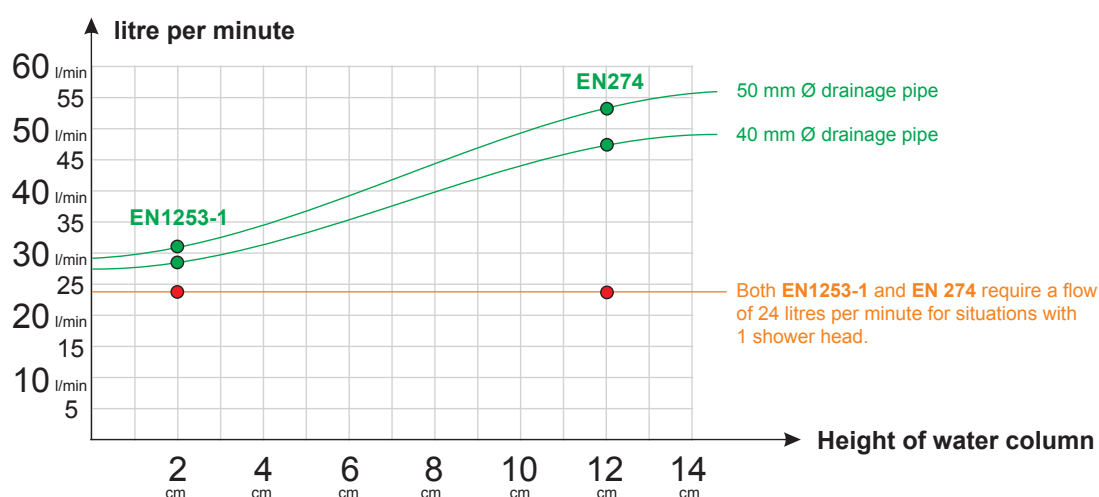

January 2016
Report no.